


PATTERN comfortBack^{eco}

CONSTRUCTION STRUCTURE STRUKTUR STRUCTUUR	Tufted 1/10" Loop, printed Tufté 1/10" Bouclé, imprimé Getuftet 1/10" Schlinge, gedruckt Getuft 1/10" Luspool, bedrukt	FIRE RESISTANCE COMPOTEMENT AU FEU BRENNVERHALTEN BRANDGEDRAG	EN 13501-1: B _s -s1
PILE MATERIAL COUCHE D'USURE POLMATERIAL POOLMATERIAAL	100% PA 6	FASTNESS TO LIGHT SOLIDITÉ À LA LUMIÈRE LICHTECHTHEIT LICHTECHTHEID	ISO 105-B02 ≥ 5-6
SECONDARY BACKING DOSSIER RÜCKENAUSSTATTUNG RUG	comfortBack ^{eco} : shock absorbing and noise reducing carpet tile backing enhanced with a fully recyclable polyolefin based layer made from minimum 60% post-industrial recycled content	RUBBING FASTNESS SOLIDITÉ AU FROTTEMENT REIBECHTHEIT WRIJFECHTHEID	EN ISO 105-X12 ≥ 4
TOTAL WEIGHT POIDS TOTAL GESAMTGEWICHT TOTAAL GEWICHT	Ca. 3.700 g/m ²	COLOUR FASTNESS TO WATER SOLIDITÉ À L'EAU WASSERECHTHEIT WATERECHTHEID	EN ISO 105-E01 ≥ 4
PILE WEIGHT POIDS DU VELOURS POLEINSATZGEWICHT POOLGEWICHT	Ca. 605 g/m ²	THERMAL RESISTANCE RÉSISTANCE THERMIQUE WÄRMEDURCHLABWIDERSTAND WARMTEDOORLAATWEERSTAND	ISO 8302 0,11 m ² K/W
PILE ABOVE BACKING POIDS DE VELOURS UTILE POLNUTZSCHICHTGEWICHT NUTTIG POOLGEWICHT	Ca. 372 g/m ²	IMPACT NOISE RATING ISOLATION PHONIQUE TRITTSCHALLVERBESSERUNGMAß GELUIDSISOLATIE	ISO 10140 ΔL _w : Ca. 29 dB
TOTAL HEIGHT ÉPAISSEUR TOTALE GESAMTDICKE TOTAAL DIKTE	Ca. 8,5 mm	SOUND ABSORPTION ABSORPTION PHONIQUE SCHALLABSORPTIONSGRAD GELUIDSABSORPTIE	ISO 354 α _w : 0,30
PILE HEIGHT ÉPAISSEUR DU VELOURS POLDICKE POOLHOOGTE	Ca. 3,1 mm	PERMANENT ANTISTATIC ANTISTATIQUE PERMANENT PERMANENT ANTISTATISCH PERMANENT ANTISTATISCH	ISO 6356 ≤ 2 kV
PILE DENSITY DENSITÉ DU VELOURS POLROHDICHTE POOLDICHTHEID	Ca. 0,120 g/cm ³	TRANSVERSAL RESISTANCE RÉSISTANCE TRANSVERSALE DURCHGANGSWIDERSTAND DOORGANGSWEERSTAND	ISO/DIS 10965 ≤ 10 ¹¹ Ohm
TUFT DENSITY NOMBRE DE TOUFFES NOPPENZAHL AANTAL PUNTEN	Ca. 218.000 /m ²	SIZE & PACKING DIMENSION & EMBALLAGE ABMESSUNG & VERPACKUNG AFMETINGEN & VERPAKKING	50 cm x 50 cm box: 4 m ² pallet: 20 boxes
CLASSIFICATION CLASSEMENT KLASSIFIKATION CLASSIFICATIE	EN 1307 33 - LC1	NUMBER OF COLOURS NOMBRE DE COLORIS ANZAHL DER FARBEN AANTAL KLEUREN	9, Special colours possible Coloris spéciaux possible Sonderfarben möglich Speciale kleuren mogelijk
CASTOR CHAIR SUITABILITY EMPLOI CHAISE À ROULETTES STUHLROLLENEIGNUNG ROLSTOELGESCHIKTHEID	EN 985 A : continuous use	DIMENSIONAL STABILITY STABILITÉ DIMENSIONNELLE DIMENSIONSTABILITÄT DIMENSIONELE STABILITEIT	EN 986 max. 0,2%
		GUT-NR	in request
		LEED®	Product contributes toward satisfying Credits under LEED®.*
		DGNB	modulyss is member of DGNB, the German Sustainable Building Council

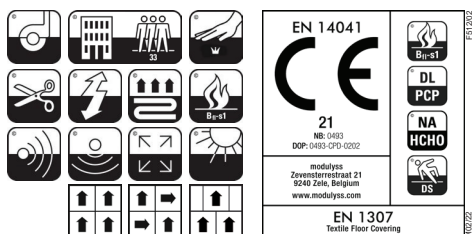

modulyss®
Zevensterrestraat 21
B 9240 Zele
T +32 (0)52 80 80 80
F +32 (0)52 80 82 00
info@modulyss.com
www.modulyss.com

We reserve all rights for technical improvements | Technische wijzigingen, ter verbetering van het product, worden voorbehouden | Sous réserve de toute modification technique visant à l'amélioration constante de nos produits

Durch technische Weiterentwicklung sind bedingte Änderungen vorbehalten

* For more information, visit the modules sustainable databases, i.e. Remark. Products are not reviewed under LEED®. LEED® credit requirements cover the performance of materials in aggregate, and the performance of individual products of brands. The LEED® green building certification program is the national accepted benchmark for the design, construction, and operation of green buildings. For more information on LEED®, visit www.usgbc.org/contact.